



BUDGET CEILING LOUDSPEAKER

RLS5/T

The RLS5/T is a budget ceiling speaker as one-piece version and a metal housing. Thanks to its spring clip, the mounting of this product is very fast. The RLS5/T is suitable for use in applications where background music is the primary requirement such as shops, restaurants, hotels, public houses, offices etc.



● Standard	
● Electrical	
Rated power, Watts	6
Tappings 100 volt line, Watts	6/3/1.5
Transformer Impedance, Ohms 100V	1.67k/3.33k/6.67k
Tappings 70.7 volt line, Watts	3/1.5/0.75
Driver impedance, Ohms	4
Effective Frequency Range, Hz (BS6840)	100-12,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	90
S.P.L. @ Full power / 1m, dB	98
Dispersion at 1kHz, Degrees	180
Directivity Axial Q factor, 1kHz	2.3
● Environmental	
IP Rating	n/a
Min/Max amb temp	n/a
Relative Humidity	n/a
● Mechanical	
Dimensions, mm	Ø174x65
Net weight, kg	0.54
Colour/Finish	White RAL9016
Material	Steel
Mounting	Snap-on, Metal clip x2
Cut-out, mm	Ø155



ATEIS Europe B.V.
 Celsiusstraat 1, 2652 XN Lansingerland, Netherlands
 Phone +31 (0)10 208 86 90, www.ateis-europe.com, info@ateis-europe.com








INSTALLATION GUIDE

RLS5/T

Front view
(unit: mm)

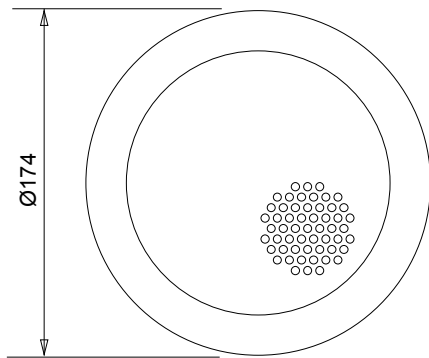


Side view
(unit: mm)

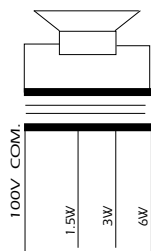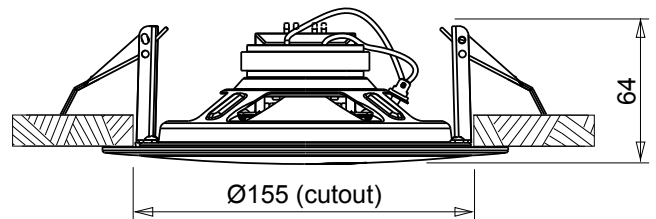

Circuit Diagram

Frequency response

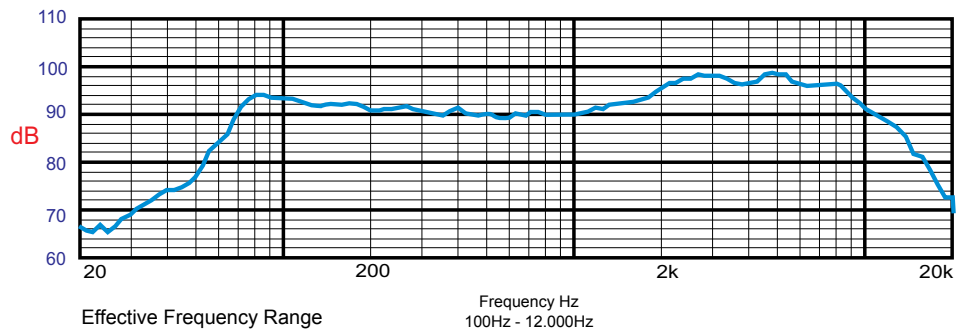

Disclaimer: We reserve the right of changes and errors.



ATEIS Europe B.V.
 Celsiusstraat 1, 2652 XN Lansingerland, Netherlands
 Phone +31 (0)10 208 86 90, www.ateis-europe.com, info@ateis-europe.com

